

Pulsafeeder's Corporation Stop Nozzle Assembly is supplied in .75in. and 1.0in. sizes and are available in both NPT (male) and AWWA (male) pipe connection. Corporation Stops provide two distinct advantages over a simple tap connection into large main pipes:

1. The nozzle may be extended for injection near the center of a large main for more effective chemical dispersion.
2. The nozzle assembly may be withdrawn and the corporation stop closed without interrupting the use of the main.

**Models J61135/J61462** Corporation Stops are supplied with a .38in. (9.5mm) diameter, injection pipe (PVC) with a .5 NPT (female) injection valve connection and a .75 NPT (male) connection to the main. Rated pressure is 150 psi maximum.

**Model J61191** Corporation Stop is supplied with a .50in. (12.7mm) diameter, injection pipe (PVC) with a .5 NPT (female) injection valve connection and a 1.0 NPT (male) connection to the main. Rated pressure is 150 psi maximum.

**Model J61136** Corporation Stop is supplied with a .50in. (12.7mm) diameter, injection pipe (PVC) with a .5 NPT (female) injection valve connection and a 1.0 AWWA (male) connection to the main. Rated pressure is 150 psi

**Models J61135-C/J61462-C** Corporation Stops are supplied with a .38in.(9.5mm) diameter, injection pipe (CPVC) with a .5 NPT (female) injection valve connection and a .75 NPT (male) connection to the main. Rated pressure is 150 psi maximum.

**Model J61191-C** Corporation Stop is supplied with a .50in. (12.7mm) diameter, Injection pipe (CPVC) with a .5 NPT (female) injection valve connection and a 1.0 NPT (male) connection to the main. Rated pressure is 150 psi maximum.

**Model J61136-C** Corporation Stop is supplied with a .50in. (12.7mm) diameter, injection pipe (CPVC) with a .5 NPT (female) injection valve connection and a 1.0 AWWA (male) connection to the main. Rated pressure is 150 psi maximum

## Features

- PVC or CPVC Nozzles
- Brass Corporation Stop
- 150 PSI (10 BAR) Maximum Pressure
- 7 ¾" (196mm) Nozzle Insertion Depth
- Stainless Steel Safety Cable

## Operating Benefits

- Available in NPT and AWWA pipe connections.
- Injection near the center of a large main for more effective chemical dispersion.
- Withdraw the nozzle assembly and close the corporation stop without interrupting the use of the main.




## Aftermarket

- Water Meters
- Gauges
- Dampeners
- Pressure Relief Valves
- KOPkits
- Tanks
- Pre-Engineered Systems



# Corporation Stop Assembly

# Corporation Stop Assembly Specifications and Model Selection

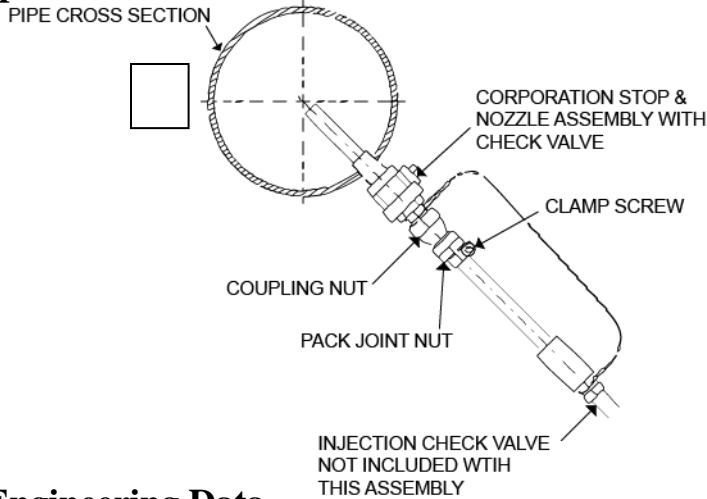

## Engineering Data


<b>J61135</b>	150 PSI Maximum
<b>Injection Pipe:</b>	
Diameter:	.38 in (9.5 mm)
Length:	7.5 in.
Material:	PVC
<b>Injection Valve Connection:</b>	.5 NPT (female)
<b>Connection to Main:</b>	.75 NPT (male)
<b>J61462</b>	150 PSI Maximum
<b>Injection Pipe:</b>	
Diameter:	.38 in (9.5 mm)
Length:	18 in.
Material:	PVC
<b>Injection Valve Connection:</b>	.5 NPT (female)
<b>Connection to Main:</b>	.75 NPT (male)
<b>J61191</b>	150 PSI Maximum
<b>Injection Pipe:</b>	
Diameter:	.50 in (12.7 mm)
Length:	7.5 in.
Material:	PVC
<b>Injection Valve Connection:</b>	.5 NPT (female)
<b>Connection to Main:</b>	1.0 NPT (male)
<b>J61136</b>	150 PSI Maximum
<b>Injection Pipe:</b>	
Diameter:	.50 in (12.7 mm)
Length:	7.5 in.
Material:	PVC
<b>Injection Valve Connection:</b>	.5 NPT (female)
<b>Connection to Main:</b>	1.0 AWWA (male)

## Engineering Data


<b>J61135-C</b>	150 PSI Maximum
<b>Injection Pipe:</b>	
Diameter:	.38 in (9.5 mm)
Length:	7.5 in.
Material:	CPVC
<b>Injection Valve Connection:</b>	.5 NPT (female)
<b>Connection to Main:</b>	.75 NPT (male)
<b>J61462-C</b>	150 PSI Maximum
<b>Injection Pipe:</b>	
Diameter:	.38 in (9.5 mm)
Length:	18 in.
Material:	CPVC
<b>Injection Valve Connection:</b>	.5 NPT (female)
<b>Connection to Main:</b>	.75 NPT (male)
<b>J61191-C</b>	150 PSI Maximum
<b>Injection Pipe:</b>	
Diameter:	.50 in (12.7 mm)
Length:	7.5 in.
Material:	CPVC
<b>Injection Valve Connection:</b>	.5 NPT (female)
<b>Connection to Main:</b>	1.0 NPT (male)
<b>J61136-C</b>	150 PSI Maximum
<b>Injection Pipe:</b>	
Diameter:	.50 in (12.7 mm)
Length:	7.5 in.
Material:	CPVC
<b>Injection Valve Connection:</b>	.5 NPT (female)
<b>Connection to Main:</b>	1.0 AWWA (male)

## Dimensions

MODEL #J61135 / J61462

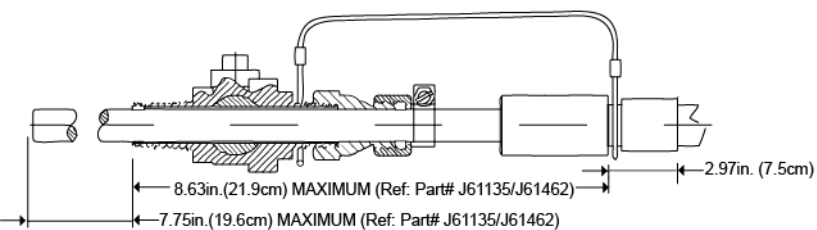

MODEL #J61136 / J61191

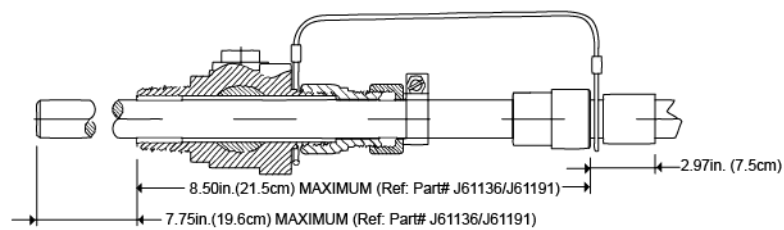

[pulsafeeder.com](http://pulsafeeder.com)



27101 Airport Rd  
Punta Gorda, FL 33982  
Phone: ++1(941) 575-3800  
Fax: ++1(941) 575-4085

An ISO 9001 and ISO 14001 Certified Company



CSA001 D12