

Clamp Mount Mixer




The Clamp Mount Mixer

provides a convenient method of attaching a mixer to a vertical surface or support such as the side wall of a tank or drum. This type of mount saves time since it requires no drilling or extra mixer supports. It also has the added advantage of being portable and can easily be transferred from one tank or drum to another. Each mount features a rugged dual clamp design which holds the mixer securely in place (1/20 hp mixers have a single clamp support). The mount is designed with a bolt secured pivot allowing adjustment of the angle at which the mixer shaft enters the tank for increased efficiency in solution agitation. This type of mixer is available in a wide variety of motor designs (OPEN, TEFC and EXPLOSION PROOF) and voltages. See reverse side for details.

Construction:

All mixers feature a 316 stainless steel shaft with an integral impeller (dual impellers standard on 48" shafts). Special epoxy and vinyl shaft coatings are available for applications where the solution being agitated is not compatible with 316 stainless steel. The shaft is coupled to the motor via a brass adapter which is held securely by four stainless steel set screws.

The clamp mount is constructed of steel and is coated with corrosion resistant paint.

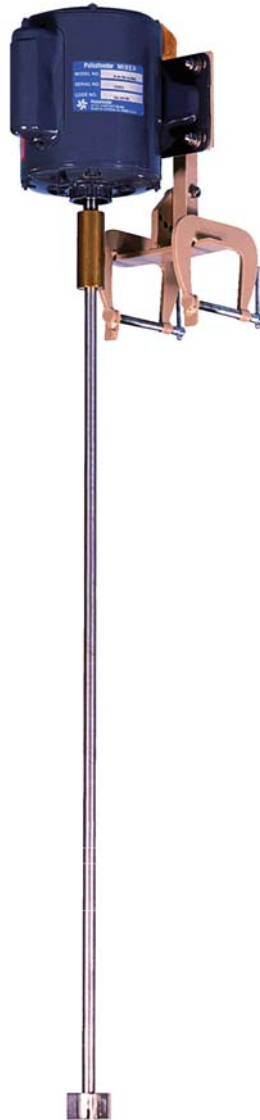

Installation:

Simply attach the mixer mount to a vertical surface by tightening c-clamps onto the support. The angle at which the mixer enters the tank can now be adjusted by loosening Bolt #1 and removing Bolt #2 (care should be taken to support mixer before Bolt #2 is removed). Adjust the mixer to the desired angle and replace Bolt #2 in one of the four bottom pivot points. Tighten both bolts.

Note: A clearance of at least 3" should be maintained from any tank bulkhead or tank wall and the impeller. Not recommended for mounting directly to a Polyethylene tank wall.

technology
innovation
diversity
excellence

Clamp Mount Mixer Specifications

Clamp Mount Mixer Selection Guide	
MOUNT:	C = Clamp Mount Mixer
HORSEPOWER:	M = 1/20 1 = 1/4 2 = 1/3 3 = 1/2 4 = 1
TYPE:	0 = Open Drip Proof Position 3 thru 5 as needed TE = Totally Enclosed Fan Cooled EXP = Explosion Proof
SHAFT:	H = 316 Stainless Steel
AVAILABLE OPTIONS:	WRD = 6' 3 wire 18 gauge SJ cord and plug installed at factory EPOXY = Special epoxy corrosion resistant coating for stainless steel impeller and shaft VINYL = Special vinyl corrosion resistant coating for stainless steel impeller and shaft recommended for sodium hypochlorite 230 = 230V Motor Suction Tube Shield Assembly. 1" PVC tube, prevents pump suction tubing from entangling with mixer blade. 28655 = 29" - 55 gallon 28656 = 20" - 35 gallon
A completed model number should look like 'C-3-TE-H/VINYL'	


Specifications

Type	OPEN								TOTALLY ENCLOSED								EXPLOSION PROOF								
Shaft Length*	34	36	44	48	28	34	36	44	48	34	36	44	48												
Horsepower	1/4	1/3	1/2	1	1/20	1/4	1/3	1/2	1	1/4	1/3	1/2	1												
RPM	1725								1500	1725															
Voltage	115	250	115	230	115	230	115	230	115	115	230	115	230	115	230	115	230	115	230						
Amperage**	6.2	3.1	6.8	3.4	8.2	4.1	14.8	7.4	2.0	5.2	2.6	6.8	3.4	9.6	4.8	13.6	6.8	4.5	2.3	6.8	3.4	9.0	4.5	13.6	6.8
Motor Design	- split phase - sleeve bearings 1 HP motors - capacitor start								1/20 HP Motors - ball bearing - shaded pole - fan cooled All Other Motors - ball bearing - automatic overload - capacitor start - fan cooled								- split phase - ball bearing - non ventilated 1 HP Motors - automatic overload - capacitor start - fan cooled								

* Shafts may be cut to desired length. 44" and 48" shafts feature dual impellers.

** 50 Hz models available, consult factory.

Mount Detail

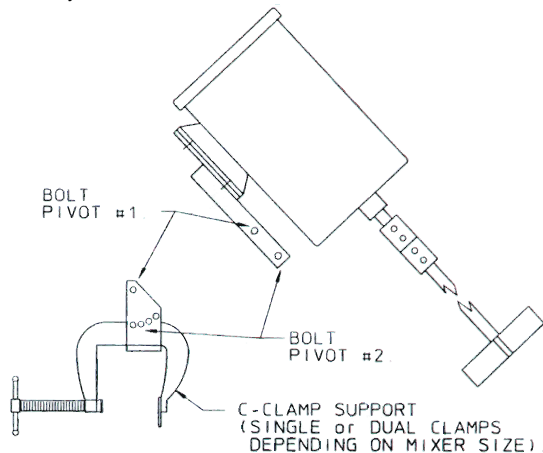

An ISO Certified Company



A Unit of IDEX Corporation



Standard Product Operations
 27101 Airport Road • Punta Gorda, Florida 33982
 TEL (941) 575-3800 • TEL 800-333-6677
 FAX (941) 575-4085 • FAX 800-456-4085
 spotech@pulsa.com • www.pulsa.com